


Specifications	F92-dy	
DIMENSIONS l x w x h	600x650x820	mm
WASHING CAPACITY dishes/H	540/360/270 1080/540/360	Nr.
WASHING CAPACITY baskets/H	30/20/15 60/30/20	Nr.
WASH CYCLE	2÷3÷4 ∞ 1÷2÷3 ∞	Min.
BASKET SIZE	50 x 50	cm
PLATES PER BASKETS	12÷18	Nr.
WORK HEIGHT	370	mm
CLEARANCE	330	mm
VOLTAGE	400 V3N-50Hz	V
ELECTRIC PUMP	650	W
WASH TANK ELEMENTS	2000	W
RINSE TANK ELEMENTS	6000	W
TOTAL RATING	6650	W
MAX CURRENT INTENSITY	10	A
TANK CAPACITY	18	Lt
BOILER CAPACITY	5	Lt
RINSE AID DISPENSER	✓	
WATER CONNECTION	45 ÷ 55	°C
CYCLE WATER CONSUMPTION	2.60	l
WATER PRESSURE	2 ÷ 4	Bar
RINSING WATER TEMPERATURE	80 ÷ 90	°C
WATER INLET	3/4"	"G
WATER OUTLET	32 mm ÷ 1"1/4	"G
NET WEIGHT	74	kG
GROSS WEIGHT	84	kG
NOISE	<54	dB(A)

Optional		
COD. AC00692	DOUBLE GUIDE TO WASH CUPS AND SAUCERS SIMULTANEOUSLY	
COD. AC00221	TIMED DISPENSER FOR LIQUID DETERGENT	
COD. AC00559	TANK DRAIN UNIT WITH FILTER	
COD. AC00005	STAINLESS STEEL BASE WITH LOWER OPEN PLACE H.450MM	
COD. AC00035	BOOSTER PUMP	
COD. AC00695	INCORPORATED WATER SOFTENER WITH AUTOMATIC REGENERATION	F92-dy-add

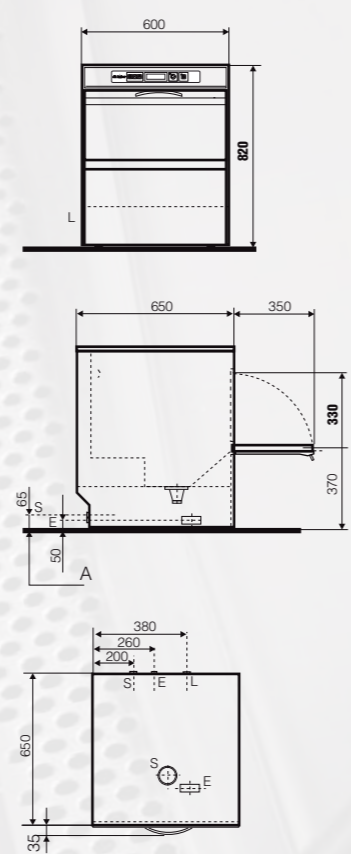


A	Maximum height for drain to wall	
E	Water inlet	3/4" G
L	Electric input	400 V3N ~ 50Hz
S	Drain	32 mm - 1"1/4 G

CE



F92-dy

Frontal dishwasher

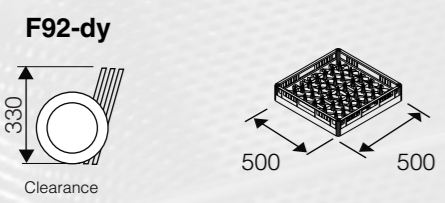

Via Italia, 6 - 26855 Lodivecchio (LO) Italy
Tel. (0371) 753202 - 754248-9 Fax (0371) 752928
www.lamber.com - e-mail: info@lamber.it

COMPANY WITH QUALITY MANAGEMENT
SYSTEM CERTIFIED BY DNV
= ISO 9001:2015 =

SERIE



FRONTAL DISHWASHER

Frontal dishwasher F92-dy - Volt 400/3/N 50Hz
 - Stainless steel construction 18/10 AISI 304
 - Insulated double skin
 Wash cycle time 60"-120"-180" seconds-endless cycle
 120"-180"-240" seconds-endless cycle

- Rotating lower and upper wash in stainless steel
- Rotating lower and upper rinse in stainless steel
- Soft-touch electronic control panel
- New control panel with interactive graphic display
- Wash and rinse temperature electronic display
- Complete programming of all the washing parameters
- Cycle counter
- Service maintenance function
- Constante rinse boiler system (RCB)
- Rinse-aid dispenser
- Tank selfwashing
- Economy thermostat
- Drawn tank with self-cleaning bottom
- Thermocontrol (device which guarantees the selected temperature for every rinsing cycle even in case of nonstop work)
- Cycle start with soft-start system
- Drawn, self-washing and counterbalanced door
- Integral tank drawer filters
- Automatic tank loading
- Door opening safety device
- Extractable control panel

S.S. nozzles designed to guarantee the best washing efficacy.



THINKING THE FUTURE

DESIGNING THE PRESENT

Complete tank filters in stainless steel construction.



The inside of the washing tank.



Tank with rounded edges and slanting bottom for the highest hygiene.



Thermic and acoustic insulation with a thickness of 14 mm.




The counterbalanced door allows to load and unload dishes more comfortably.

Easy to use, Easy to understand

The 330 mm plates clearance allows to wash any kind of dishes, glasses, pizza dishes and Gastronorm plates.

F92-dy



F92-dy



dishes PIZZA basket (option)
COD. CC00034



Plastic basket for Gastronorm (option)
COD. CC00064



General basket in plastic (accessories)
COD. CC00019

Accessories

- 2 baskets for 12÷18 dishes in plastic
- 1 general basket in plastic
- 2 cutlery containers in plastic

New control panel with interactive graphic display

- Complete programming of all the washing parameters.
- Graphic display with description of washing steps.
- Programming of the timing of detergent and rinse-aid pumps.
- Cycle counter.
- Service maintenance function.

Descaling function (option).

