


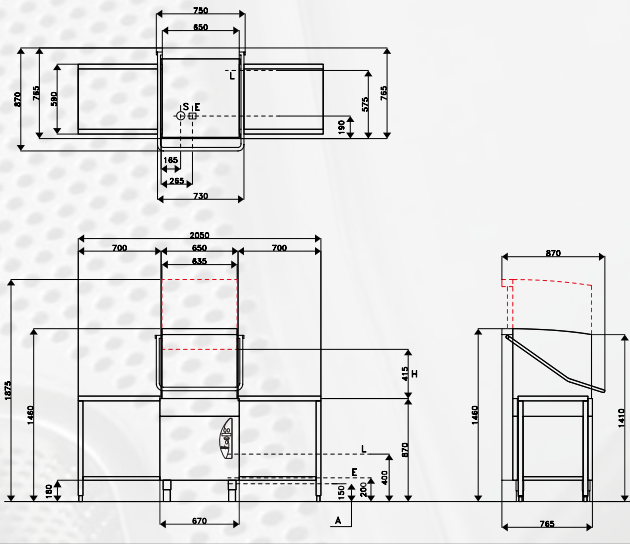


The manufacturer reserves the right to make modifications of materials and models without warning.

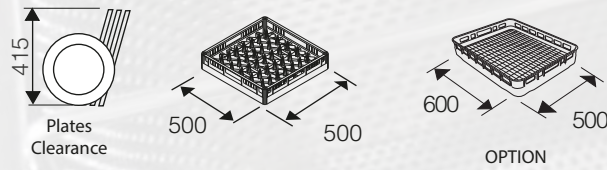
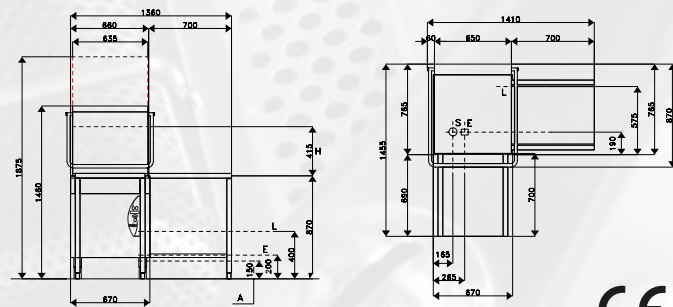
Specifications	L24-dy-plus	
DIMENSIONS l x w x h	670X765X1460	mm
WASHING CAPACITY dishes/H	1080-540-360 (1440)	Nr.
WASHING CAPACITY baskets/H	60-30-20	Nr.
WASH CYCLE	60"-120"-180"	Sec.
BASKET SIZE	500 x 500	mm
DISHES PER BASKETS	12÷18 (24)	Nr.
WORK HEIGHT	890	mm
PLATES CLEARANCE	415	mm
VOLTAGE	400 V3N-50Hz	V
S.S. PUMP	1100	W
WASH TANK ELEMENTS	6000	W
RINSE TANK ELEMENTS	9000	W
TOTAL RATING	10100	W
MAX CURRENT INTENSITY	16	A
TANK CAPACITY	34	Lt
BOILER CAPACITY	8	Lt
RINSE-AID DISPENSER	✓	
DETERGENT PUMP	✓	
SCALE REMOVER PUMP	✓	
INCORPORATED DRAIN PUMP WITH FILTER	30 W	W
WATER CONNECTION	45 ÷ 55	°C
WATER CONSUMPTION PER CYCLE	2.80	l
WATER PRESSURE	2 ÷ 4	Bar
RINSING WATER TEMPERATURE	80 ÷ 90	°C
WATER INLET	3/4"	°G
WATER OUTLET	32 mm ÷ 1"1/4	°G
NET WEIGHT	133	kG
GROSS WEIGHT	151	kG
NOISE	63,5	dB(A)

Optional		
COD. 0800754	SPECIAL "SAVE PLACE" HANDLE	
COD. AC00123	BOILER 12 KW	
COD. AC00118	BOILER 15 KW	
COD. AC00124	BOILER 18 KW	
COD. AC00429	HOOD WITH DOUBLE INSULATING WALL	
COD. 0400367	BASKET SUPPORT FOR CORNER SLIDE	
COD. AC00026	SAFE RINSE (Break tank)	
COD. AC00035	RINSING INCORPORATED BOOSTER PUMP HP 0,30	
COD. CC000139	PLASTIC GENERAL BASKET 600X500 MM	
COD. CC000140	PLASTIC BASKET 600X500 MM FOR 22/24 DINNER PLATES	 600 x 500
COD. CC000141	PLASTIC BASKET 600X500 MM FOR 10/12 GASTRONORM TRAYS	

LINEAR VERSION



CORNER VERSION



Via Italia, 6 - 26855 Lodi Vecchio (LO) Italy
Tel. (0371) 753202 - 754248-9 Fax (0371) 752928
www.lamber.com - e-mail: info@lamber.it

COMPANY WITH QUALITY MANAGEMENT
SYSTEM CERTIFIED BY DNV
= ISO 9001:2015 =



SERIE



L24-dy-plus

Pass-through dishwasher

Pass-through dishwasher

A complete machine for the most demanding public catering

New control panel with interactive graphic display.

- Complete programming of all the washing parameters.
- Graphic display with description of washing steps.
- Programming of the timing of detergent, rinse-aid and scale remover pumps.
- Cycle counter.
- Service maintenance function.
- Descaling function.

L24-dy-plus

THINKING THE FUTURE

DESIGNING THE PRESENT

lamber

- Pass-through dishwasher Volt 400/3/N 50Hz
- Straight or corner version
- Stainless steel construction 18/10 AISI 304
- Rotating lower and upper wash arms in stainless steel
- Rotating lower and upper rinse arms in stainless steel
- Soft-touch electronic control panel
- Interactive graphic display that shows all washing phases
- Washing and rising temperatures displaying
- Complete programming of all the washing parameters
- Programming of the timing of detergent, rinse-aid and descaling pumps
- Cycle counter
- Service maintenance function
- Descaling function
- Constante rinse boiler system (RCB)
- Incorporated drain pump with filter.
- Rinse-aid dispenser
- Detergent pump
- Scale remover pump
- Tank-Self washing cycle
- Economy thermostat
- Thermocontrol
- Tank with double insulated wall
- Drawn tank with self-cleaning bottom
- Integral tank drawer filters
- Automatic cycle start at hood shutting
- Automatic tank loading
- Safety device for hood opening



Complete filtering area with extractable tank filter in stainless steel construction.



Drawn tank with self-cleaning bottom for the highest hygiene.



S.S. wash and rinse arms, designed to guarantee the best washing efficacy.



The rack side is detachable and so it allows an easy cleaning of the wash tank.

Accessories

- 1 basket in plastic for 12÷18 dishes
- 1 basket in white rilsan steel for 24 dishes
- 1 general basket
- 2 cutlery containers

ALSO FOR 600X500 MM BASKET!



The rilsan coated basket supplied with the machine allows you to wash up to 24 plates simultaneously.



The plastic basket with 2 cutlery inserts supplied with the machine allows you to wash cups and glasses.



12 plates Pizza Basket ø300 mm (option)



The wash pump with S.S. body and S.S. impeller guarantees high reliability and efficacy. The immediate accessibility to the components simplifies servicing operations.

Efficient

The hood is closed on the 4 sides to keep in itself all the produced heat and reduce the energy waste.

Optimal

Rinse and wash nozzles are designed to obtain the highest pressure and distribution of the jet during all the cycle.

Easy

The interactive display is simple, intuitive and it provides the user with all necessary information.

Constant

The RCB system (Rinse Constant Boiler) assures a constant temperature during all the phase of the rinsing cycle.

Accessoires

Code	COD.	Description	Icon
PL	AC00125	LATERAL ENTRY/EXIT TABLE EDGE 40 MM WITH LOWER TABLE	
PSL	AC00221	ENTRY OR EXIT LIFTED SIDE SHELF WITH LOWER SPACE FOR BASKETS - EDGE 40 MM	
PLV	AC00500	PRE-WASHING TABLE IN STAINLESS STEEL, RIGHT OR LEFT, WITH ONE TANK 400X400X200 MM, SPLASH SHIELD AND LOWER TABLE.	
PLVS	AC00055	PRE-WASHING TABLE IN STAINLESS STEEL, RIGHT OR LEFT, WITH ONE TANK 400X400X200 MM, SPLASH SHIELD, LOWER TABLE & HOLE FOR WASTE EXHAUST.	

The top of the hood is inclined to facilitate dewatering at the end of the washing cycle.

